URC Utility Relay Company

AC-PRO-II® PROCEDURE

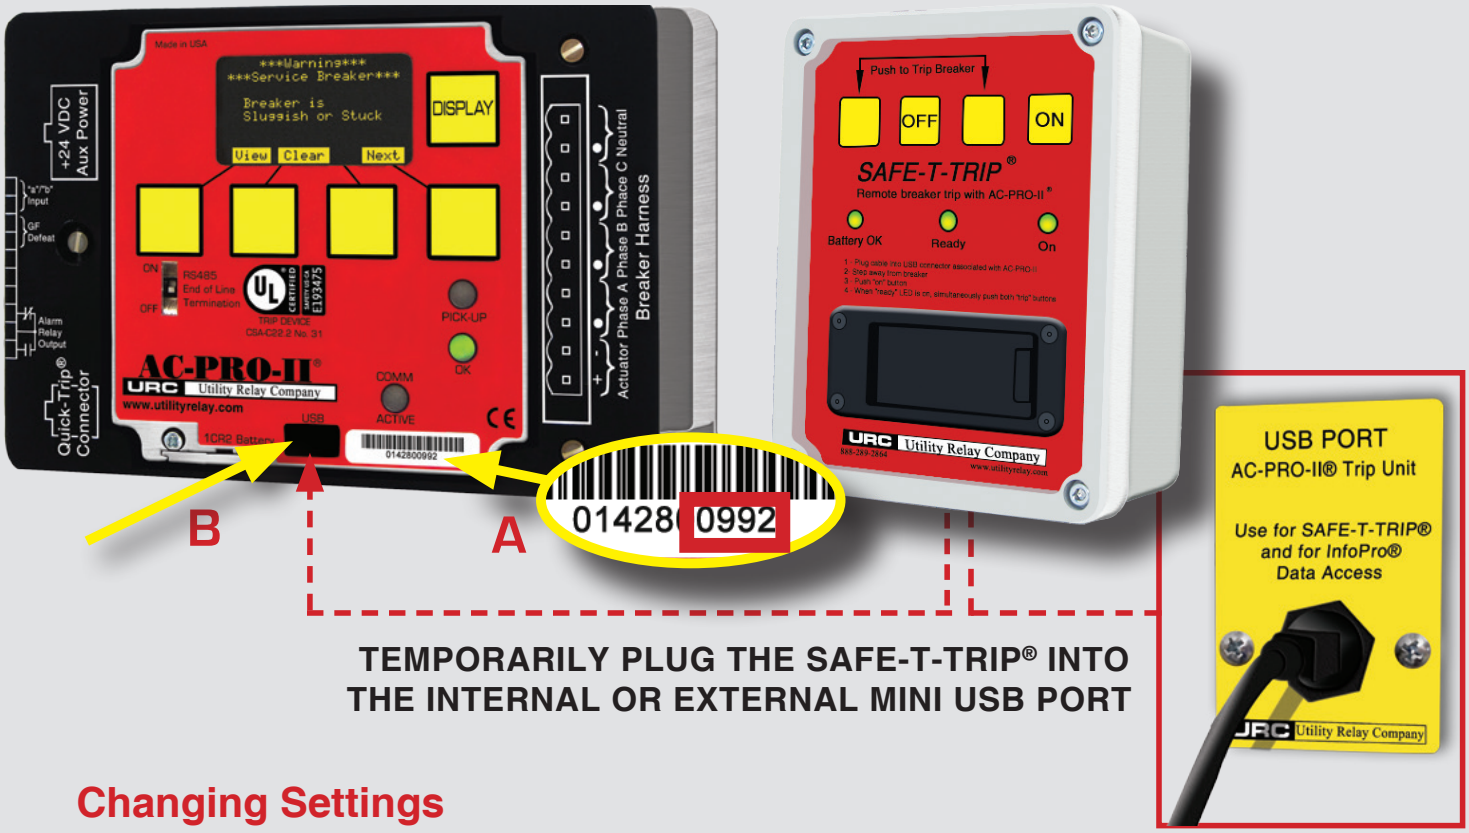

TEMPORARILY PLUG THE SAFE-T-TRIP® INTO THE INTERNAL OR EXTERNAL MINI USB PORT

Changing Settings

To change the settings using the buttons or a computer, a security code is required. The security code is the last four (4) digits of the serial number (see A).

USB Port

The mini USB port (see B) is used for remotely tripping the breaker with SAFE-T-TRIP® (sold separately) and interfacing with a computer running InfoPro-AC.

Scan this QR code with your mobile device to be taken to the instruction manual section on our website.